

Waterproof Creased Leaflets


supplying guide for waterproof creased leaflets

Creased in Half

Side 1




Side 2

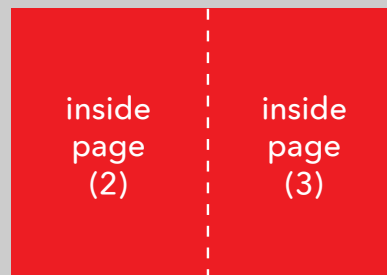

Waterproof Creased Leaflets Checklist

- ✓ Artwork is 300dpi
- ✓ CMYK Colour profile
- ✓ All fonts embedded
- ✓ Correct fold has been selected when ordering
- ✓ Artwork is correct orientation

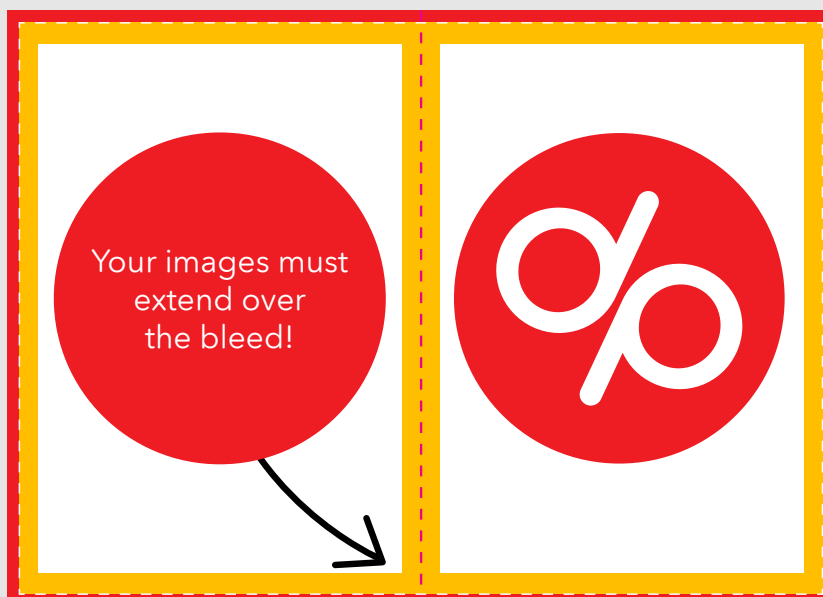

Bleed (3mm)

The bleed area extends 3mm beyond the edge of your finished document. Colours and images must extend beyond the edge of the document to prevent unwanted white borders around the edge of your finished document. Note that this 'bleed' will be trimmed during the finishing process so ensure that no important details are set up to print in this area.

Safe Area (5mm)

It is recommended that your artwork is at least 5mm from the edge of the page if it is not meant to bleed off. Printed borders placed too close to the edge of a page may look uneven when the job is trimmed.

Need more help?

We have a range of templates for you to choose from!
You can find them at the bottom of each product page.